


## FEATURES

- This interface will change a pneumatic signal into an electrical signal.
- Equipment can be fitted on standard symmetrical rail



- ① Standard microswitch 5A/230 V
- ② Symmetrical rail EN 50022
- ③ Pneumatic signal
- ④ Marking tag
- ⑤ Visual indication of pneumatic input
- ⑥ Manual override
- ⑦ Adjustment of switching pressure 1 to 8 bar
- ⑧ Electrical signal : - common  
- normal closed contact  
- normal open contact

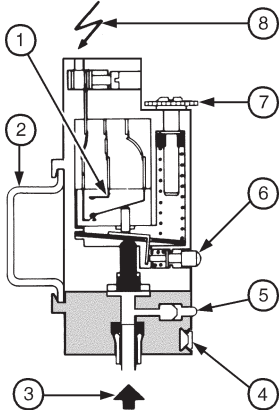

## GENERAL

**Switching pressure**

Adjustable from 1 to 8 bar

**Hysteresis**

15% at 4 bar

**Switching capability**

5 A - 230 V (Resistive)

**Ambient temperature**

-10°C to +50°C



**Electrical connections**

3 screw terminals (IP20)

**Maximum wire size**

0,75 mm<sup>2</sup>

## CONNECTIONS



## CHOICE OF EQUIPMENT

designation	code
pneumatic, electric interface with manual override	30400009
50 blank marking tags	33400042

## DIMENSIONS (mm), WEIGHT (kg)



weight
0,048

